



 **N O R D I K S T O N E**



NIRO GRANITE[®]
T H E S W I S S Q U A L I T Y T I L E

Coloured body full vitrified porcelain tiles.



Coloured body full vitrified porcelain tiles.




Blizzard
N01

Fohn
N03

Kosawa
N04

Bora
N02

NORDIK STONE

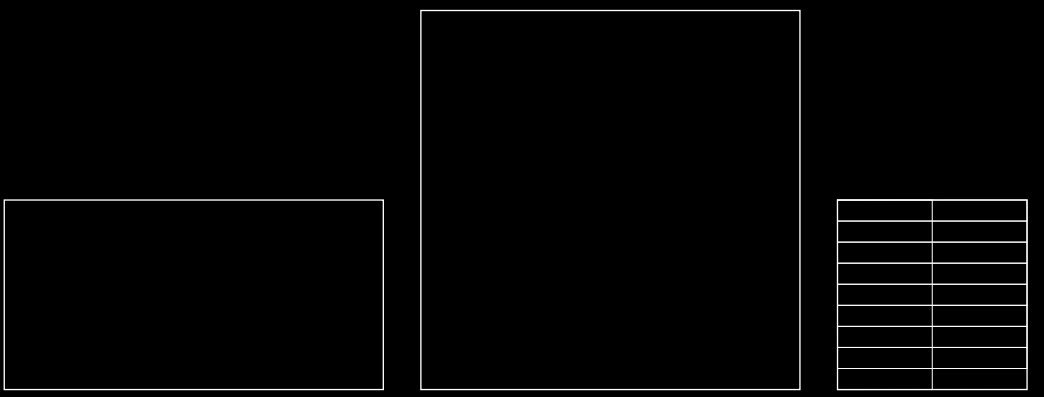


Format: 60 x 30 cm. 60 x 60 cm. Mosaic 30 x 30 cm.




BLIZZARD 60 x 60 cm
BLIZZARD Mosaic 30 x 30 cm

N01 BLIZZARD

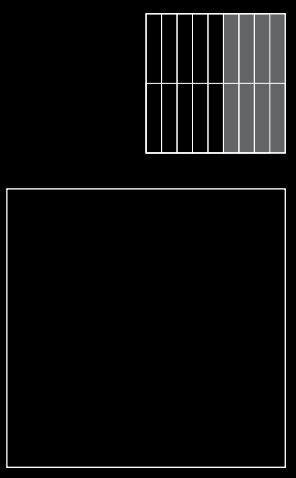



30x60

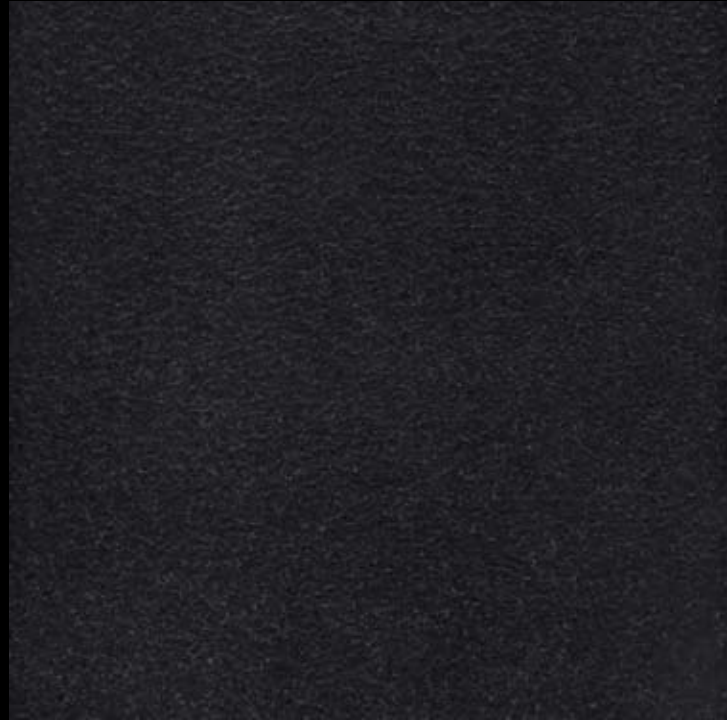

NIRO GRANITE
THE SPIRIT OF QUALITY TILE



NORDIK STONE


Coloured body full vitrified porcelain tiles.

N03 Fohn 30x60cm





⬆️ **N02 Bora** 30x60cm




⬆️ **NORDIK STONE**




Coloured body full vitrified porcelain tiles.

⬆️ **N01 Blizzard** mosaic 30x30cm





① N04 Kosawa 60x60cm



① NORDIK STONE  NIRO GRANTE

THE SWISS QUALITY TILE



Coloured body full vitrified porcelain tiles.



Format: 60 x 30 cm. 60 x 60 cm. Mosaic 30 x 30 cm.

Coloured body full vitrified porcelain tiles.

BLIZZARD




N01

Blizzard 30x60cm




Blizzard 60x60cm



Blizzard Mosaic 30x30cm

BORA

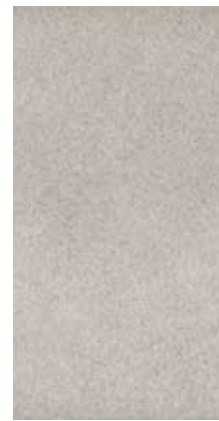


N02

Bora 30x60cm



Bora 60x60cm



Bora Mosaic 30x30cm

FOHN




N03

Fohn 30x60cm




Fohn 60x60cm



Fohn Mosaic 30x30cm

KOSAWA

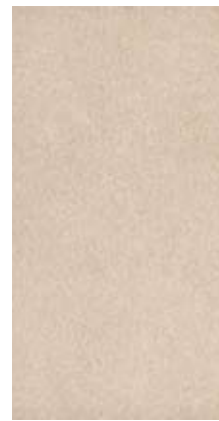


N04

Kosawa 30x60cm



Kosawa 60x60cm



Kosawa Mosaic 30x30cm

NORDIK STONE

NIRO GRANITE

TECHNICAL SPECIFICATIONS

| Description | MS ISO 13006 test methods | Measurement unit | MS ISO 13006 requirements (Annex G) | Niro Granite |
|--------------------------------|---------------------------|-------------------|-------------------------------------|-------------------|
| Length & width | 10545-2 | % | ± 0.5 | ± 0.25 |
| Thickness | 10545-2 | % | ± 5.0 | ± 2.50 |
| Planarity | 10545-2 | % | ± 0.5 | ± 0.25 |
| Rectangularity | 10545-2 | % | ± 0.6 | ± 0.30 |
| Sides straightness | 10545-2 | % | ± 0.5 | ± 0.25 |
| Water absorption | 10545-3 | % | ≤ 0.5 | ≤ 0.20 |
| Modulus of rupture | 10545-4 | N/mm ² | ≥ 35 | ≥ 40 |
| Resistance to surface abrasion | 10545-7 | mm ³ | ≤ 175 | min. PEI 3 |
| Frost resistance | 10545-12 | Visual check | No visible crack | No visible crack |
| Chemical resistance | 10545-13 | Visual check | No visible change | No visible change |
| Surface quality | 10545-2 | Visual check | min 95% | Comply |

Each different tiles series are produced to meet different performance requirements. For specific product technical performance, please request from Niro Granite sales team or their agent or distributor.

Colour Variations: Since the colour reproduction in this printed piece will vary from the actual tile colours, final selection should be made from tile samples. Colour, shade and glaze variations may exist due to the inherent characteristics of porcelain tile.



SIRIM
CERTIFIED TO MS ISO 9001
Registration No. AR 0698





www.nirogranite.com.my